




SPIJKSTAAL 301 - 301L - 301LZ

The Spijkstaal 301 is particularly suitable for towing light loads for short distances and on smooth surfaces. With this kind of transport the driver leaves the vehicle continuously. It has become clear that using a towtruck with a low step is much more efficient and less tiring for the driver. The 301 is valued for its extreme maneuverability, perfect ergonomics, fast acceleration, compact size and low weight.

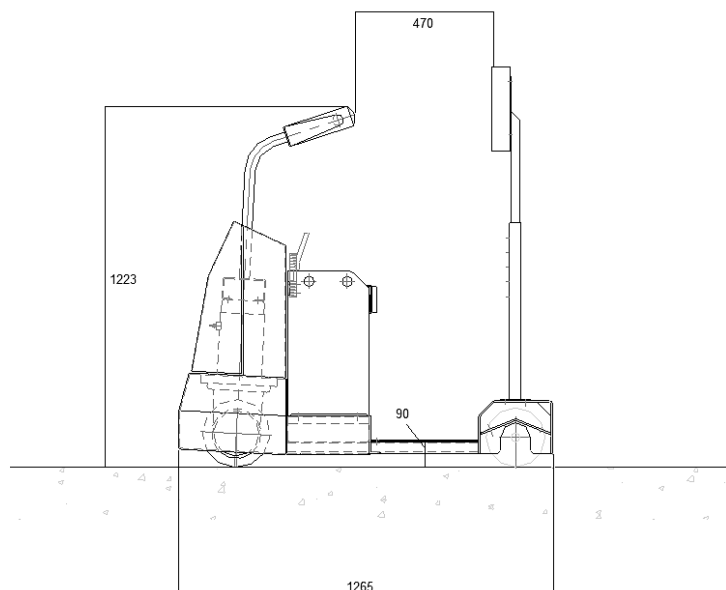

SPIJKSTAAL.COM



	301	301L	301LZ	
DRIVE / BATTERY				
Asynchrone AC motor	2.3	2.3	2.3	kW
Battery voltage	24	24	24	V
Battery capacity	345	345	345	Ah
Transmission	1:11	1:11	1:25	
PERFORMANCE				
Max. speed	13	13	9	km/h
Pull capacity	1.000	1.500	3.000	kg
Max. drawbar pull	1.200	1.200	1.750	N
WEIGHTS				
Service weight (incl. batt.)	470	470	470	kg
DIMENSIONS				
Lenght	1.095	1.265	1.265	mm
Width	750	750	750	mm
Track width rear	668	635	635	mm
Wheelbase	675	950	950	mm
Ground clearance, centre of wheelbase	70	40	40	mm
Turning radius	975	1.250	1.250	mm
TYRES / SUSPENSION				
Tyre size, front	300*75	300*75	300*75	
Tyre size, rear	160*50(2)	200*50(4)	200*50(4)	
Suspension front	Rigid	Rigid	Rigid	
BRAKES				
Service brake	Electromagnetic brake			
Parking brake	Electromagnetic brake			
OPTIONS E.G.				
Battery exchange system	Bluespot			
Flash light	Various trailer couplings			

Spijkstaal International B.V.
Mandemakerstraat 150-152
3194 DG Hoogvliet
+31 (0)181457030
info@spijkstaal.nl